





- Particularly suitable for lightweight and medium-weight distribution transport
- 1,000 kg lifting capacity with 600 mm load distance
- Weight-optimised tail lift with four cylinders
- Approval of underride guard for maximum permissible weight of 12 t
- Equipment with aluminium or steel platform
- Two different lifting arm lengths and lifting arm pitches available

LOAD DIAGRAM

a (mm)	Q (kg)
600	1000
750	800
950	600
1,400	400



PROVEN AND RELIABLE WITH OPTIMISED WEIGHT

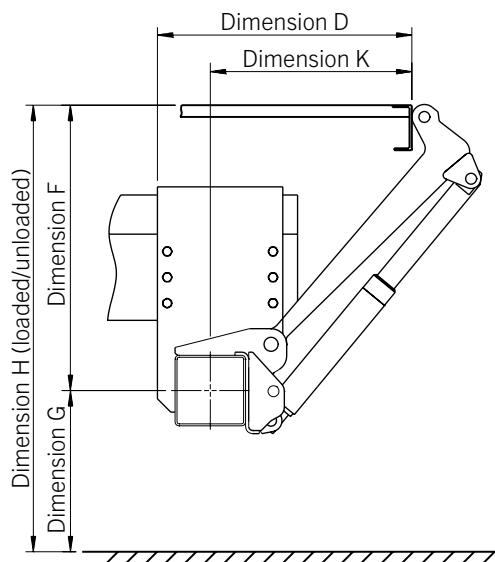

WEIGHTS

Aluminium platform type

Platform width (mm)	2,400
Platform height (mm)	
1,600	282 kg
1,700	289 kg
1,800	295 kg

Steel platform type

Platform width (mm)	2,400
Platform height (mm)	
1,509	357 kg
1,809	402 kg

DIMENSIONS

Lifting arm lengths (mm)	600	700
H (max.) loading height, unloaded	1,100	1,210
H (min.) loading height, loaded	750	830
F (max.) middle of main beam to upper edge of loading floor	620	650
K (min.) at dimension F (max.)	467	592
D (min.) installation dimension, minimum	617	742
F (min.)	420	500
K (max.) at dimension F (min.)	652	721
D (max.) installation dimension, maximum	802	871

TECHNICAL DATA

Type	MBB C 1000 L
Lifting capacity	1,000 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders
Platform overlap with floor	-44 mm
Lifting arm pitch	1,100/1,320 mm
Load centre, longitudinal	600 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to -10°

