





- The weight-optimised heavy-load tail lift
- 2,500 kg lifting capacity with 750 mm load distance
- Four-cylinder lifting mechanism with four lifting arm lengths from 700 to 1,000 mm
- Available with aluminium or steel platform
- Many options available

LOAD DIAGRAM

a (mm)	Q (kg)
750	2,500
900	2,050
1,100	1,700
1,600	1,150
2,400	750



2,500 KG LIFTING CAPACITY WITH OPTIMISED WEIGHT

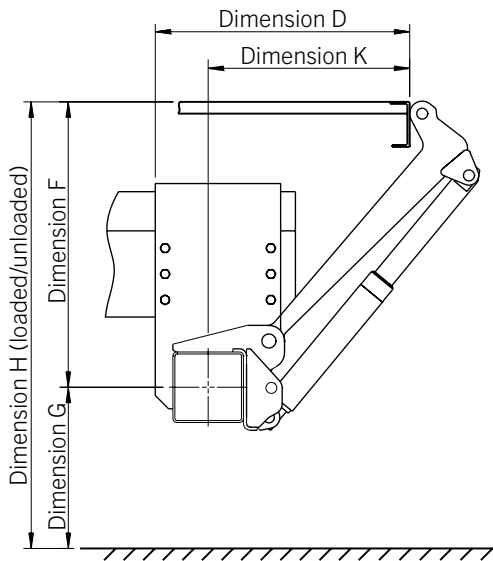

WEIGHTS

Aluminium platform type

Platform width (mm)	2,500
Platform height (mm)	
1,850	547 kg
2,100	569 kg

Steel platform type

Platform width (mm)	2,500
Platform height (mm)	
2,009	735 kg
2,109	785 kg

DIMENSIONS

Lifting arm lengths (mm)	700	800	900	1,000
H (max.) loading height, unloaded	1,160	1,345	1,444	1,651
H (min.) loading height, loaded	883	916	1,006	950
F (max.) middle of main beam to upper edge of loading floor	650	785	820	977
K (min.) at dimension F (max.)	618	641	751	721
D (min.) installation dimension, minimum	768	791	901	871
F (min.)	508	566	614	569
K (max.) at dimension F (min.)	726	820	907	1,040
D (max.) installation dimension, maximum	876	970	1,057	1,190

TECHNICAL DATA

Type	MBB C 2500 L
Lifting capacity	2,500 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders
Platform overlap with floor	-63 mm
Lifting arm pitch	1,300 mm
Load centre, longitudinal	750 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to -10°

